



### 3.5W LED Pendant Light PNT128-02 & PNT128-05

- 3.5W by 1,050mA constant current
- Push-fit into PNT128 pendant module

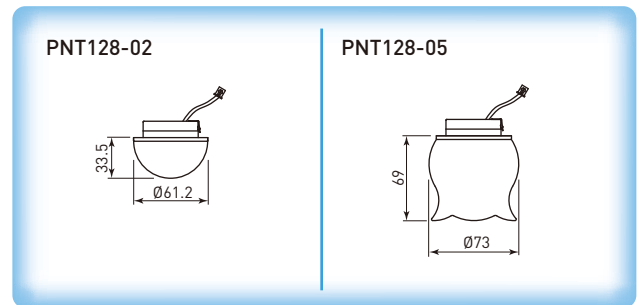


Illustration	Article Code	Model	Light color / Finish
		<b>PNT128-02</b>	
	08.002128.221	PNT128-02NB-CW	cool white / bright silver
	08.002128.411	PNT128-02ABN-WW	warm white / brushed stainless
		<b>PNT128-05</b>	
	08.002130.221	PNT128-05NB-CW	cool white / bright silver
	08.002130.411	PNT128-05ABN-WW	warm white / brushed stainless



PNT128-04NB-CW



PNT128-20ABN-WW

### 3.5W LED Pendant Light PNT128-04 & PNT128-20

- 3.5W by 1,050mA constant current
- Push-fit into PNT128 pendant module

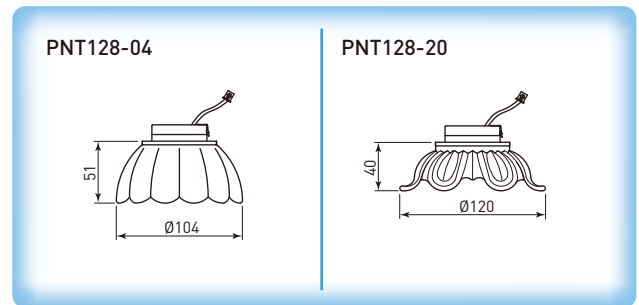


Illustration	Article Code	Model	Light color / Finish
		<b>PNT128-04</b>	
	08.002129.221	PNT128-04NB-CW	cool white / bright silver
	08.002129.411	PNT128-04ABN-WW	warm white / brushed stainless
		<b>PNT128-20</b>	
	08.002137.221	PNT128-20NB-CW	cool white / bright silver
	08.002137.411	PNT128-20ABN-WW	warm white / brushed stainless



## Uno-Disc Pendant Module SCL-PNT128

- Surface mounting on ceiling
- With LD1050.1 LED driver for 3.5W
- LED light not included, to be selected and sold separately
- Various lengths of fiber glass DC wire (WL) available

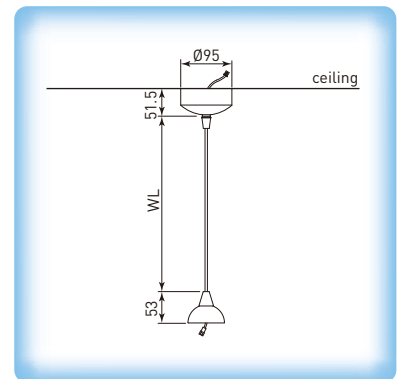

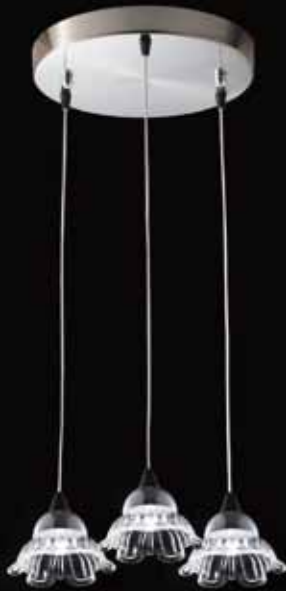


Illustration	Article Code	Model	Wire Length (WL)
		• Finish: pendant cap in bright silver, canopy in polished chrome	
	08.146000.201	SCL-PNT128NB-WL32	320mm
	08.246000.201	SCL-PNT128NB-WL82	820mm
	08.346000.201	SCL-PNT128NB-WL132	1,320mm
	08.446000.201	SCL-PNT128NB-WL182	1,820mm
		• Finish: brushed stainless	
	08.146000.401	SCL-PNT128ABN-WL32	320mm
	08.246000.401	SCL-PNT128ABN-WL82	820mm
	08.346000.401	SCL-PNT128ABN-WL132	1,320mm
	08.446000.401	SCL-PNT128ABN-WL182	1,820mm



SCL33-PNT128-20NB-WL-CW

## Trio-Disc Pendant Module SCL33-PNT128

- Surface mounting on ceiling
- With LD1050.3 LED driver for 10.5W
- Steel canopy of Ø300mm in brushed stainless
- LED light not included, to be selected and sold separately
- Wire length (WL) adjustable (shortened) with 500mm range


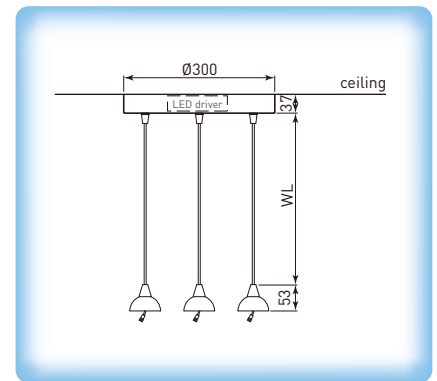


Illustration	Article Code	Model	Wire Length (WL)	
<p>SCL33-PNT128ABN-WL</p>		• Finish: pendant cap in bright silver, steel canopy in brushed stainless		
	08.236000.201	SCL33-PNT128NB-WL82	820mm	
	08.436000.201	SCL33-PNT128NB-WL182	1,820mm	
			• Finish: brushed stainless	
	08.236000.401	SCL33-PNT128ABN-WL82	820mm	
	08.436000.401	SCL33-PNT128ABN-WL182	1,820mm	

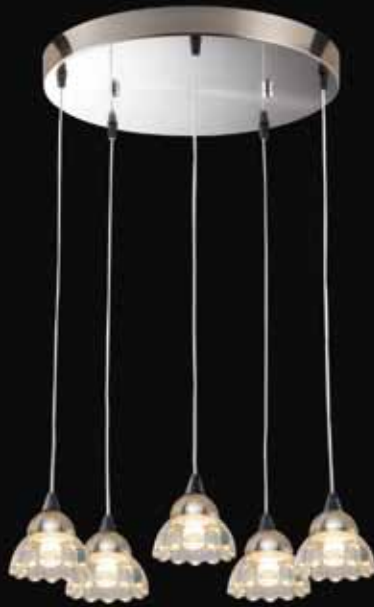

SCL54-PNT128-04ABN-WL-WW

## Quinqu-Disc Pendant Module SCL54-PNT128

- Surface mounting on ceiling
- With LD1050.5 LED driver for 17.5W
- Steel canopy of Ø400mm in brushed stainless
- LED light not included, to be selected and sold separately
- Wire length (WL) adjustable (shortened) with 500mm range 500mm L. (but not to cut)

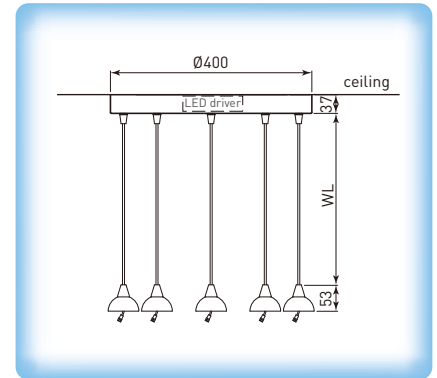



Illustration	Article Code	Model	Wire Length (WL)	
 <p>SCL54-PNT128NB-WL</p>		<ul style="list-style-type: none"> <li>• Finish: pendant cap in bright silver, steel canopy in brushed stainless</li> </ul>		
	08.238000.201	SCL54-PNT128NB-WL82	820mm	
	08.438000.201	SCL54-PNT128NB-WL182	1,820mm	
			<ul style="list-style-type: none"> <li>• Finish: brushed stainless</li> </ul>	
	08.238000.401	SCL54-PNT128ABN-WL82	820mm	
	08.438000.401	SCL54-PNT128ABN-WL182	1,820mm	



SCL90-PNT128-02ABN-WL82-WW

## Nona-Cubic Pendant Module SCL90-PNT128

- Surface mounting on ceiling
- With LD700.7-12 LED driver for 9 x 2.5W or 22.5W
- Steel canopy of 500 x 500mm in brushed stainless
- LED light not included, to be selected and sold separately
- Wire length (WL) adjustable (shortened) with 500mm range

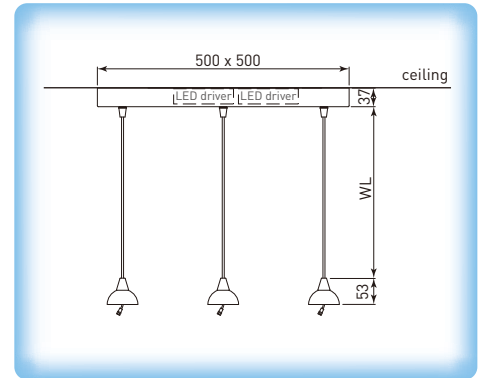




Illustration	Article Code	Model	Wire Length (WL)
		<ul style="list-style-type: none"> <li>• Finish: pendant cap in bright silver, steel canopy in brushed stainless</li> </ul>	
	08.239000.201	SCL90-PNT128NB-WL82	820mm
		<ul style="list-style-type: none"> <li>• Finish: brushed stainless</li> </ul>	
	08.239000.401	SCL90-PNT128ABN-WL82	820mm



SCL204-PNT128-04NB-WL-CW



SCL204-PNT128-04ABN-WL-WW

## Duo-Linear Pendant Module SCL204-PNT128

- Linear surface mounting on ceiling
- With LD1050.2 LED driver for 7W
- LED light not included, to be selected and sold separately
- Various length of fiber glass DC wire length (WL) adjustable (shortened) with 300mm range

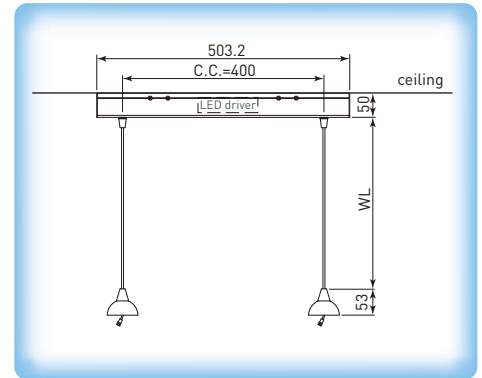


Illustration	Article Code	Model	Wire Length (WL)
		• Finish: bright silver	
	08.241000.201	SCL204-PNT128NB-WL82	820mm
	08.341000.201	SCL204-PNT128NB-WL132	1,320mm
	08.441000.201	SCL204-PNT128NB-WL182	1,820mm
		• Finish: brushed stainless	
	08.241000.401	SCL204-PNT128ABN-WL82	820mm
	08.341000.401	SCL204-PNT128ABN-WL132	1,320mm
	08.441000.401	SCL204-PNT128ABN-WL182	1,820mm



SCL304-PNT128-20NB-WL-CW



SCL304-PNT128-02ABN-WL-WW

## Trio-Linear Pendant Module SCL304-PNT128

- Linear surface mounting on ceiling
- With LD1050.3 LED driver for 10.5W
- LED light not included, to be selected and sold separately
- Various length of fiber glass DC wire length (WL) adjustable (shortened) with 300mm range

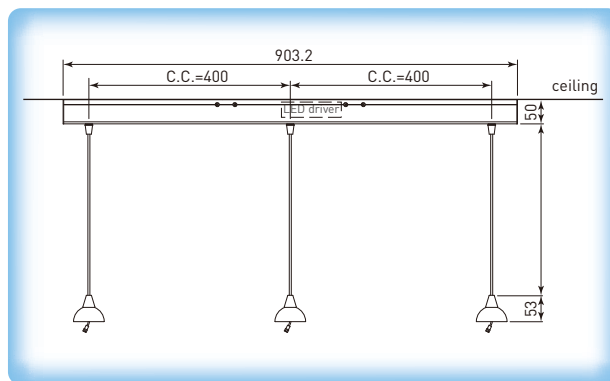


Illustration	Article Code	Model	Wire Length (WL)
		• Finish: bright silver	
	08.143000.201	SCL304-PNT128NB-WL32	320mm
	08.243000.201	SCL304-PNT128NB-WL82	820mm
	08.343000.201	SCL304-PNT128NB-WL132	1,320mm
	08.443000.201	SCL304-PNT128NB-WL182	1,820mm
		• Finish: brushed stainless	
	08.143000.401	SCL304-PNT128ABN-WL32	320mm
	08.243000.401	SCL304-PNT128ABN-WL82	820mm
08.343000.401	SCL304-PNT128ABN-WL132	1,320mm	
08.443000.401	SCL304-PNT128ABN-WL182	1,820mm	