





## Mini-X Recessed Display LED Linear Light | PLD1511



- Application: individual spot illumination for showcase, jewellery display
- With 40° optical lens, 36° tilt & 360° swivel
- Solid aluminium housing, recessed mounting
- Compatible power supply: 350mA or 700mA constant current LED driver

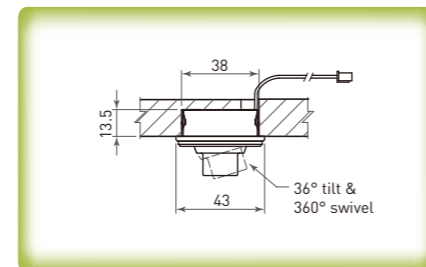

- Routed dimension: 38 x 13.5 x RL (mm)



Model	Illustration	RL
PLD1511-24	L=240mm, 2 LEDs (2.4 W)	230mm
PLD1511-36	L=360mm, 3 LEDs (3.6 W)	350mm
PLD1511-48	L=480mm, 4 LEDs (4.8 W)	470mm
PLD1511-60	L=600mm, 5 LEDs (6 W)	590mm

## Mini-X Recessed Display LED Linear Light | PLD1511

Illustration	Article Code	Model	Description
	black (NK)		
	09.511.321	PLD1511-24NK-CW	cool white
	09.511.311	PLD1511-24NK-WW	warm white
	09.512.321	PLD1511-36NK-CW	cool white
	09.512.311	PLD1511-36NK-WW	warm white
	09.513.321	PLD1511-48NK-CW	cool white
	bright silver (NB)		
	09.511.221	PLD1511-24NB-CW	cool white
	09.511.211	PLD1511-24NB-WW	warm white
	09.512.221	PLD1511-36NB-CW	cool white
	09.512.211	PLD1511-36NB-WW	warm white
	09.513.221	PLD1511-48NB-CW	cool white
09.513.211	PLD1511-48NB-WW	warm white	
09.514.221	PLD1511-60NB-CW	cool white	
09.514.211	PLD1511-60NB-WW	warm white	