




PLD260 + T260SK



Uni-X2SQ LED Down Light (5W) | **PLD260**



- Application: ambient illumination for living room and hall way. Suitable for installation in ceiling
- Solid aluminium housing in various finishes
- With reflector & diffuser
- Compatible power supply: 700mA constant current XP LED power system

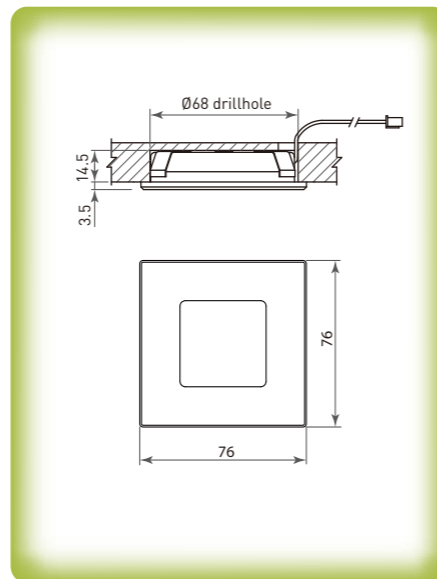

Uni-X2SQ LED Down Light (5W) | **PLD260**

Illustration	Article Code	Model	Description
		With reflector & diffuser	
	09.260.422	PLD260ABN-CW	brushed stainless, cool white
	09.260.412	PLD260ABN-WW	brushed stainless, warm white
		Flat surface mount housing, aluminium, screw fixing	
	2.22941	T260SK-ABN	brushed stainless